

PRO Comfort Bath – Fixed Height

Delivering reliable performance and functionality for a care home setting.



Optimised for efficiency and performance in multi-user settings the PRO Comfort bath is a fixed height bath with powered seat.

The PRO Comfort fixed height bath offers a powered transfer seat that moves the bather smoothly in and out of the bath, providing a relaxing and safe bathing environment for bather and carer.

Sizes available:

PRO Comfort Bath Fixed height bath available in 1500 and 1700 lengths.



Key features:

- Powered seat traverse effortlessly transfers the bather in and out of the bath, reducing the need for manual handling
- The 1700mm full length bath boasts extra-long internal bathing length and wide seating area, ensuring optimum comfort for bathers
- The ultra-compact 1500mm bath is perfect for space restricted environments
- TMV3 controls maintain a safe, comfortable, pre-set water temperature, reducing any risk of scalding
- Shepherds crook shower offers CAT5 protection suitable for commercial environments
- Easy clean stainless steel bath seat frame and adjustable nursing arms for client comfort and safety
- Reliable, quiet electronics with integrated battery backup safety system in case of mains power failure
- Ergonomic and intuitive remote handset for easy and simple operation
- Comes as standard with a full height front panel. End panel, Island and Peninsular panel options available
- 165kg (25 stone), safe lifting weight accommodates the majority of bathers
- Left or right-hand configurations adapt to any bathroom layout



Gainsborough Healthcare Group
Life enhancing bathing.

01527 40022

info@gainsboroughbaths.com

www.gainsboroughbaths.com


PRO Comfort Bath – Fixed Height

Technical Drawings

PRO Comfort Bath – Fixed Height

Dimensions in millimetres (mm).

Right-hand example (handing of a bath is indicated by the exit point of the bath when in a seated position).

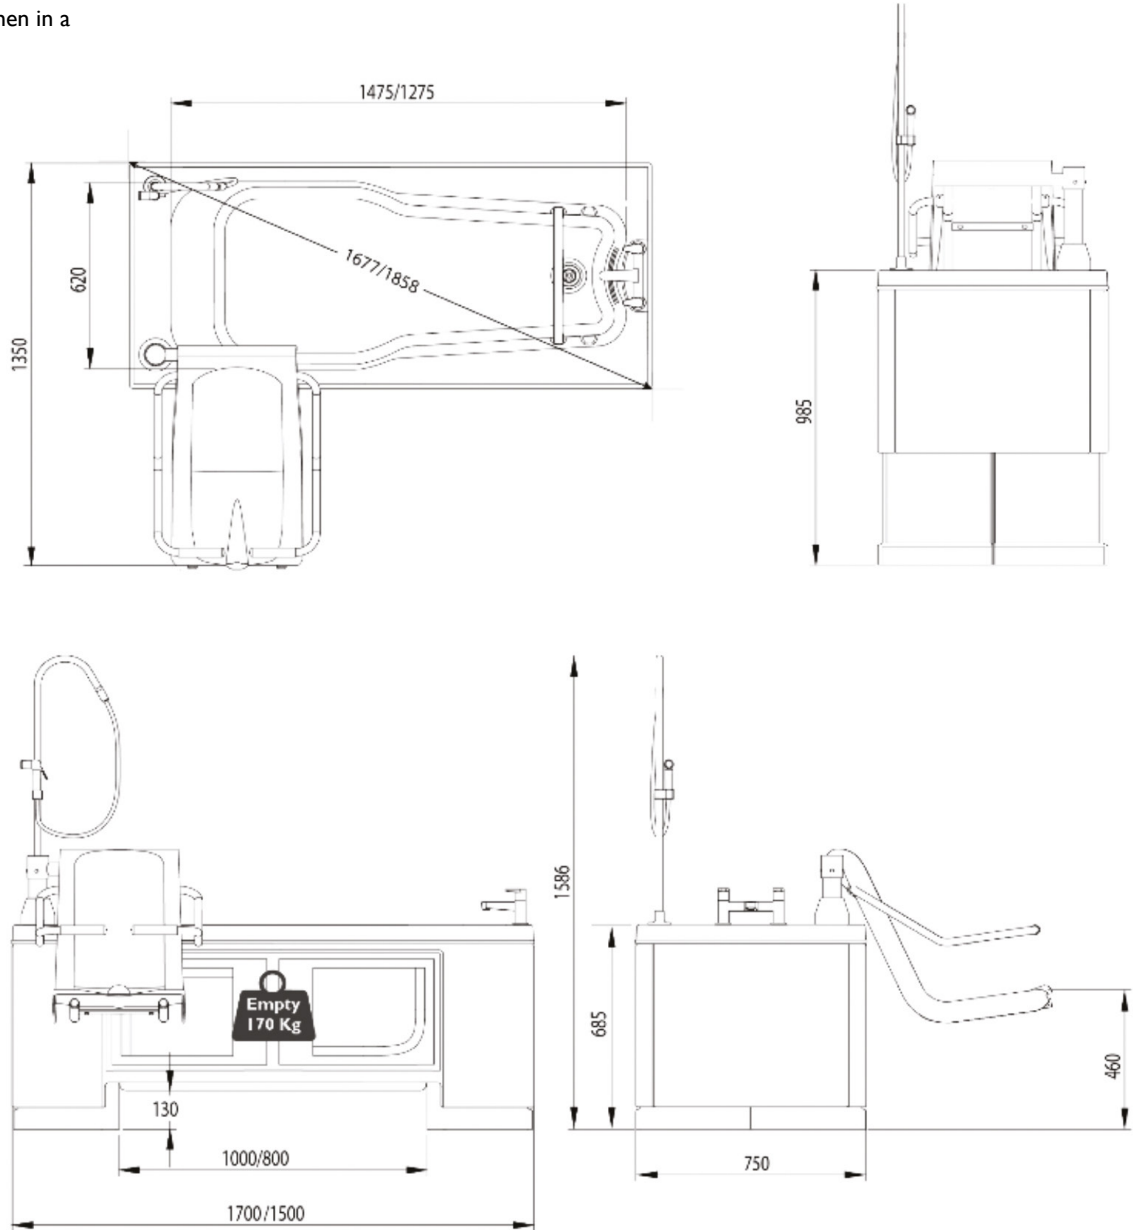

Gainsborough Healthcare Group
Life enhancing bathing.

01527 40022

info@gainsboroughbaths.com
www.gainsboroughbaths.com

PRO Comfort Bath – Fixed Height

Technical specification

Length (mm)	1500/1700
Width (mm)	750
Height (mm)	685
Internal depth (mm)	420
Footwell width (mm)	420
Internal width (mm)	605
Internal length (mm)	1275/1475
Seat Base length / width (mm)	460/430
Seat transfer height when down outside bath (mm).	460
Bath height with shower pole 1500 baths only (mm)	1586
Hoist Tunnel - HA panel option 1500/1700 (mm)	130*800 / 130* 1000
Maximum user weight	165kg
Water capacity	1500mm - 200 litres 1700mm - 230 litres
Approximate bath weight (empty)	1500mm - 115kg 1700mm - 119kg
Approximate bath weight (full)	1500mm - 315kg 1700mm - 349kg
Typical mechanical operation times	Seat - 232secs/cycle

Class I Electrical Device	
Power supply	Mains 230V to be supplied via 30mA RCD
Operating voltage	24V
Battery backup	24V DC lead acid, for emergency use only
Actuator duty cycle	Max. 10% or 2min continuous use followed by 18min not in use. The life cycle test has been performed with a stabilised power supply (10% duty cycle) on a 20mm stroke actuator at max. load for 10,000 cycles at ambient temperature
Water supply	Unblended Hot & Cold water at 1bar Min > 3.5bar Max pressure
IP Rating	IPX3
A' weighted sound emission	<60dB(A)
A' weighted sound emission with air spa system (option)	<75dB(A)
Ambient temperature range	5°C to 50°C
Relative humidity range	10-80%
Atmospheric pressure range	50kPa to 106kPa
Medical Device Category	Class I

